



Franchise Utility Right-of-Way Permit

275 East 200 North, American Fork, UT 84003 • (801)763-3065 • (801)763-3005 - fax • www.afcity.org

Date: Jan 19, 2017

Job #: _____

Location of Cut: _____

APPLICANT/CONTACT INFORMATION			
Contact Person	Pam Rigby		
Company Name:	CentraCom		
Address:	PO Box 7		
City:	Fairview	State:	UT
		Zip:	84629
Phone:	435.427.0648	Cell:	
Email:	pamrigby@centracom.com	Fax:	435.427.0808

EXCAVATOR/CONTRACTOR INFORMATION			
Contact Person	Brett Johnson	24 Hour Contact:	435.469.0394
Company Name:	CentraCom/MKJ Construction	Phone/Cell:	435.469.0394
Address:	PO Box 7		
City:	Fairview	State:	UT
		Zip:	84629
Phone:	435.427.0648	Cell:	
Email:	pamrigby@centracom.com	Fax:	435.427.0808
License No:	87-0537159		

STREET CUT INFORMATION	
Purpose of cut:	
Installing 478' 1 1/4" conduit/fiber on north side of road on 1100 S within PU right of way. Installing handhole at 1073 S	
Installing 283' 1 1/4" conduit/fiber on east side of Auto Mall Dr . Accessing existing handhole. Direction drill no asphalt cut required.	
Approximate Start Date:	1/25/17
Approximate Completion Date:	2/17/17


Applicant agrees to perform operations in rights-of-way under the jurisdiction of American Fork City in accordance with the appropriate provisions contained in the "American Fork City Standards and Specifications" as well as any special provisions that shall apply to this permit, and by this reference, are made a part thereof. Contact Jay Butcher at 801-404-9500 at least 48 hours prior to proceeding with work. A copy of the approved permit and all supporting documentation must be available on site.

#17-01005
Permit Number

I. Branch Cox I. Branch Cox
Applicant Name (print)

Brett Johnson 1/31/17
Engineering Division Representative

C.E.O. _____
Applicant Title

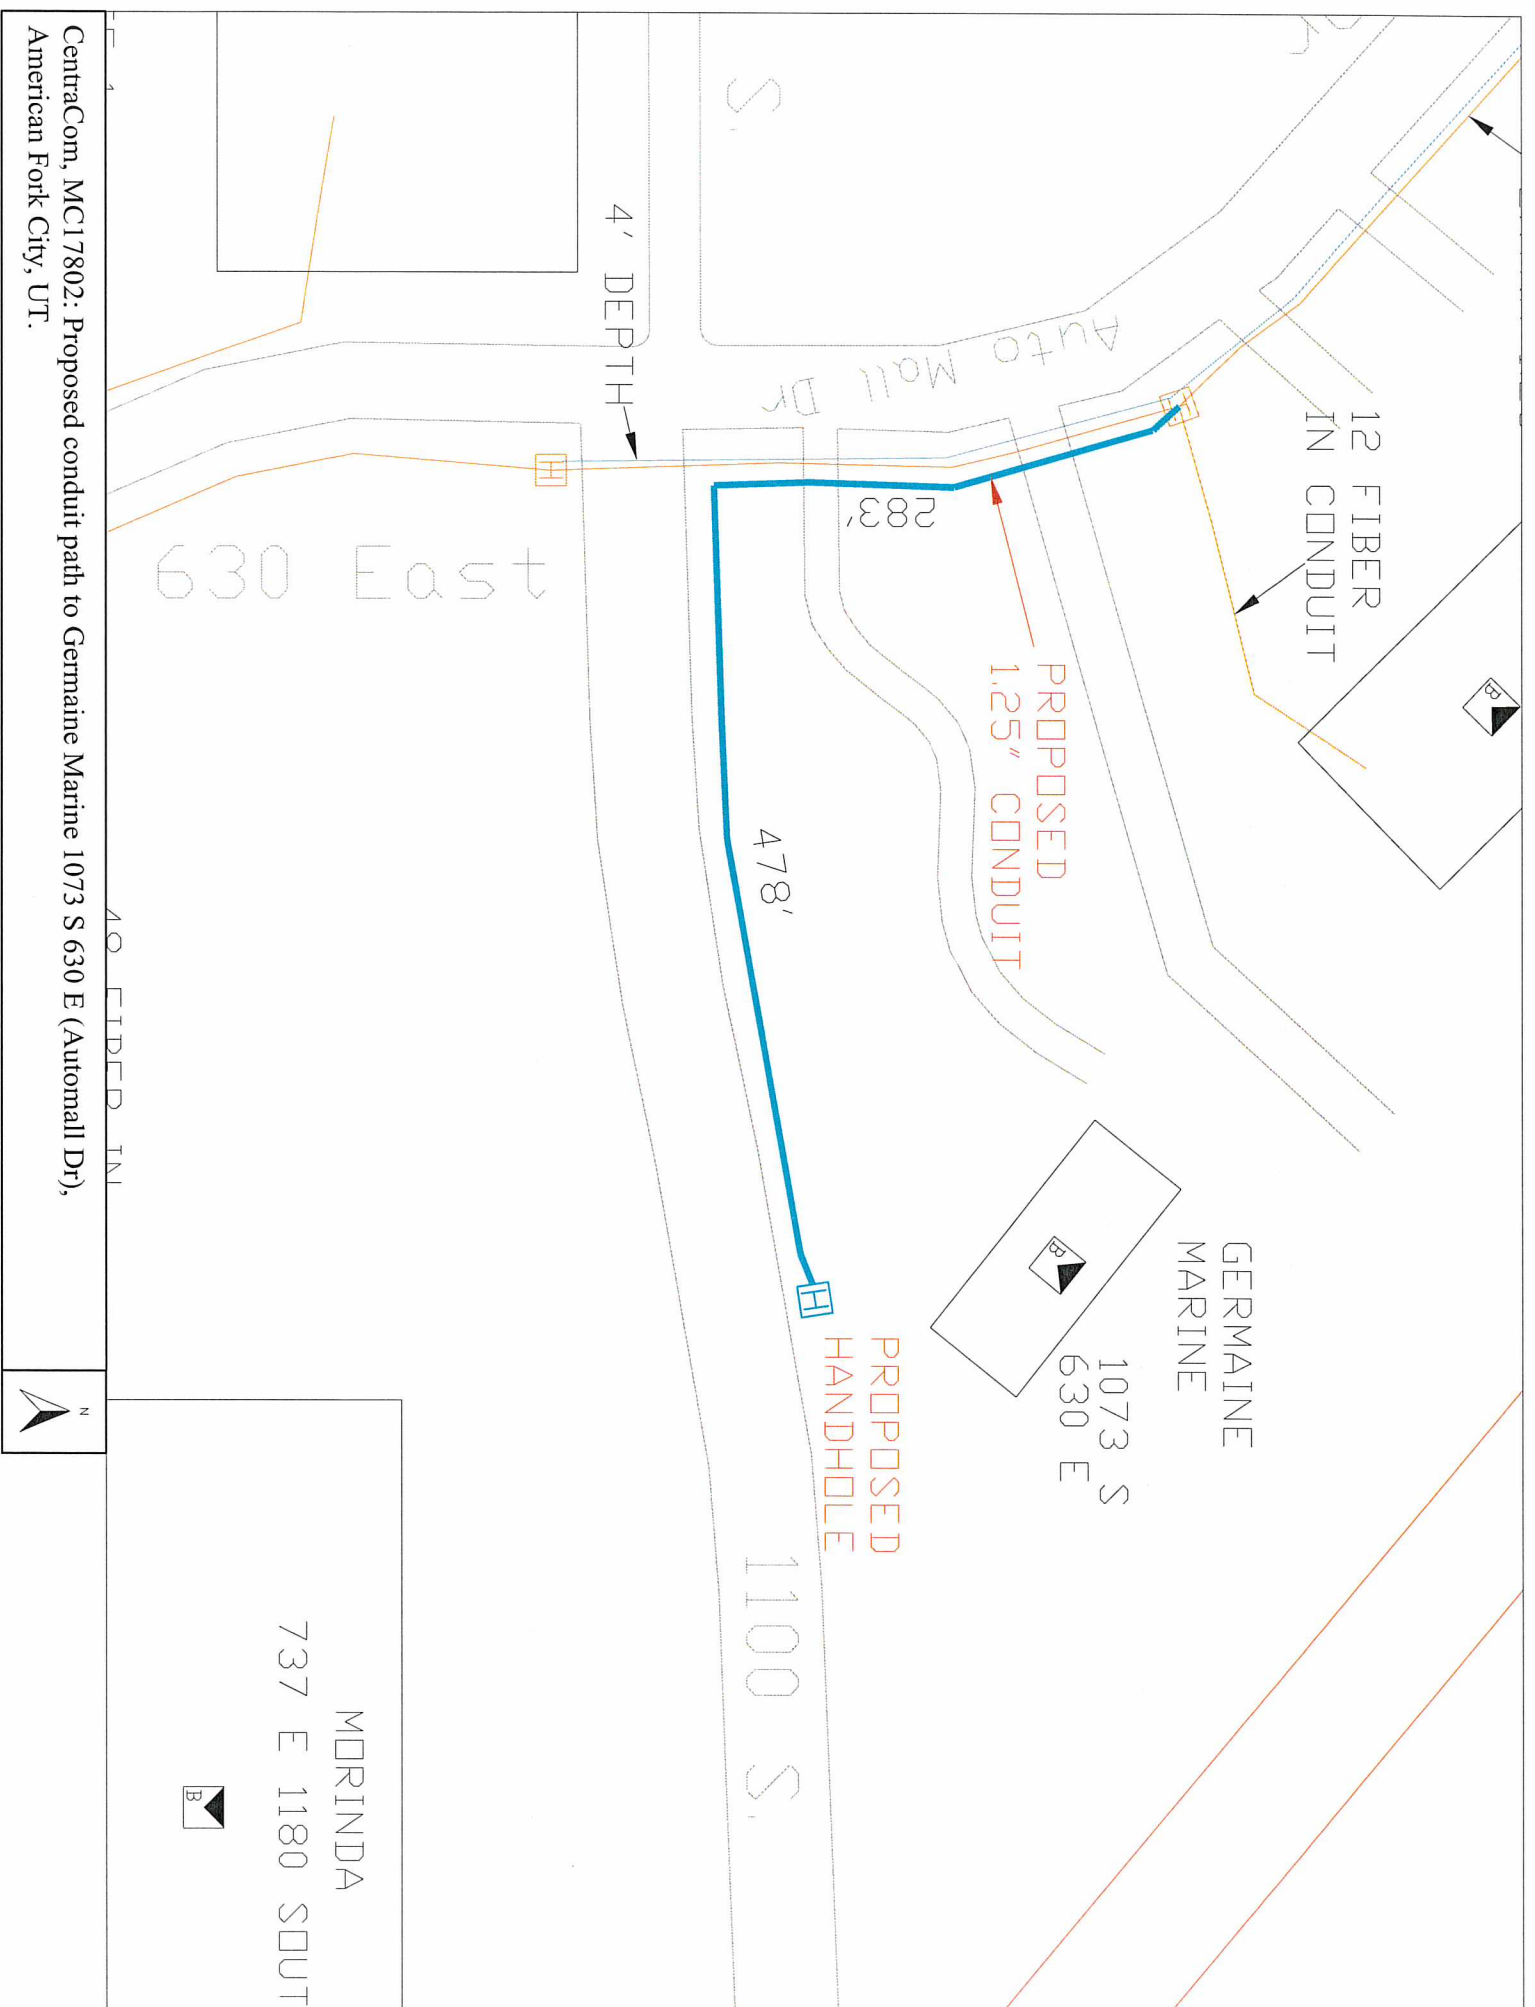

12 FIBER
IN CONDUIT

PROPOSED
1.25" CONDUIT

PROPOSED
HANDHOLE

4' DEPTH

630 East

GERMAINE
MARINE

1073 S
630 E

1100 S.

MORINDA
737 E 1180 SOUT

CentraCom, MCI17802: Proposed conduit path to Germaine Marine 1073 S 630 E (Automall Dr),
American Fork City, UT.




Date: 1/19/2017 Author: CentraCom Project: Germaine Marine

Comments:

Installing 478' 1 1/4" conduit/fiber on 1100 S.
Installing 238' 1 1/4" conduit/fiber on Auto Mall Dr.
Accessing existing handhole. Installing handhole.
Directional drill, no asphalt cut required.

Taper, Buffer Zone & Sign Spacing				
Posted speed	Mini Taper Length	Length of Buffer	Min Sign Spacing	Devices Spacing
30	180'	200'	100'	15'
35	245'	250'	350'	20'
40	320'	305'	350'	27'
45	540'	380'	500'	45'
50	600'	425'	500'	50'
55	660'	495'	500'	55'
60	720'	570'	500'	60'
65	780'	645'	500'	65'



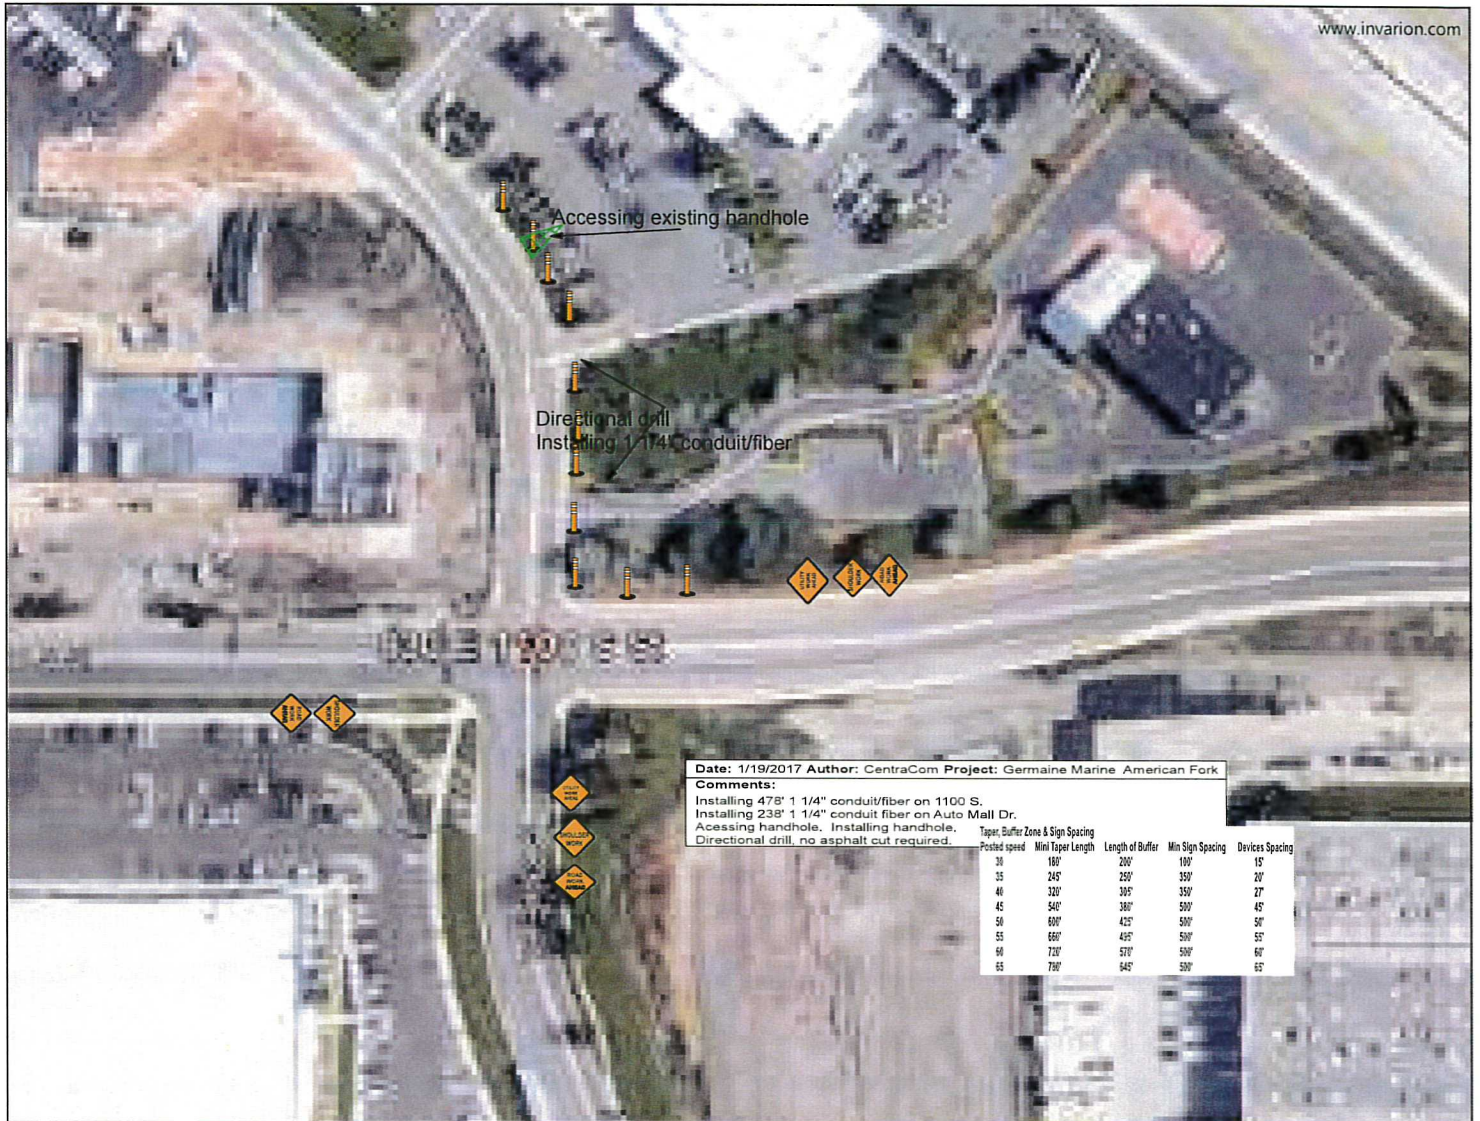

Date: 1/19/2017 Author: CentraCom Project: Germaine Marine American Fork

Comments:
Installing 478' 1 1/4" conduit/fiber on 1100 S.
Installing 238' 1 1/4" conduit fiber on Auto Mall Dr.
Accessing handhole. Installing handhole.
Directional drill, no asphalt cut required.

Posted speed	Min Taper Length	Length of Buffer	Min Sign Spacing	Devices Spacing
30	160'	200'	100'	15'
35	245'	250'	350'	20'
40	320'	305'	350'	27'
45	540'	380'	500'	45'
50	600'	425'	500'	50'
55	660'	495'	500'	55'
60	720'	570'	500'	60'
65	780'	645'	500'	65'